


GENERAL NOTES

1. CONTRACTOR WILL VERIFY ALL DIMENSIONS AND FIELD CONDITIONS PRIOR TO THE START OF THE WORK.
2. CONTRACTOR WILL REPAIR ANY DAMAGE TO EXISTING INTERIOR FLOOR, WALL, CEILING, ETC. SURFACES CAUSED BY ANY PORTION OF THE WORK. REPAIRS WILL MATCH ADJACENT SURFACES.
3. CONTRACTOR WILL REPAIR ANY DAMAGE TO ANY EXISTING: LANDSCAPING, FACILITY, PAVED OR CONCRETE SURFACES, ETC. CAUSED BY ANY PORTION OF THE WORK. REPAIRS WILL MATCH THE EXISTING.
4. WHEN NOTE SAYS TO MATCH EXISTING, THAT ITEM, MATERIAL, SURFACE, ETC. IDENTIFIED IS FOR REFERENCE ONLY. THE CONTRACTOR WILL VERIFY THE EXISTING CONDITION.




FLOOR PLAN REFERENCE

3/32" = 1'-0"




NOTE: IF DRAWING IS A REPRODUCTION USE THE GRAPHIC SCALE FOR ALL MEASUREMENTS

GRAPHIC SCALE



FLOOR PLAN REFERENCE

BY		DIRTECTORATE OF PUBLIC WORKS FORT BENNING, GEORGIA	
DATE			
SYMBOL		REPAIR / CONVERT BUILDING 130 TO SJA HEADQUARTERS FORT BENNING, GEORGIA	
DRAWN BY	DRAWING NUMBER	SCALE	AS NOTED
ANB	43839-A2	DATE	21 APR 17
APPROVED BY	L & E NO.		
DCS			

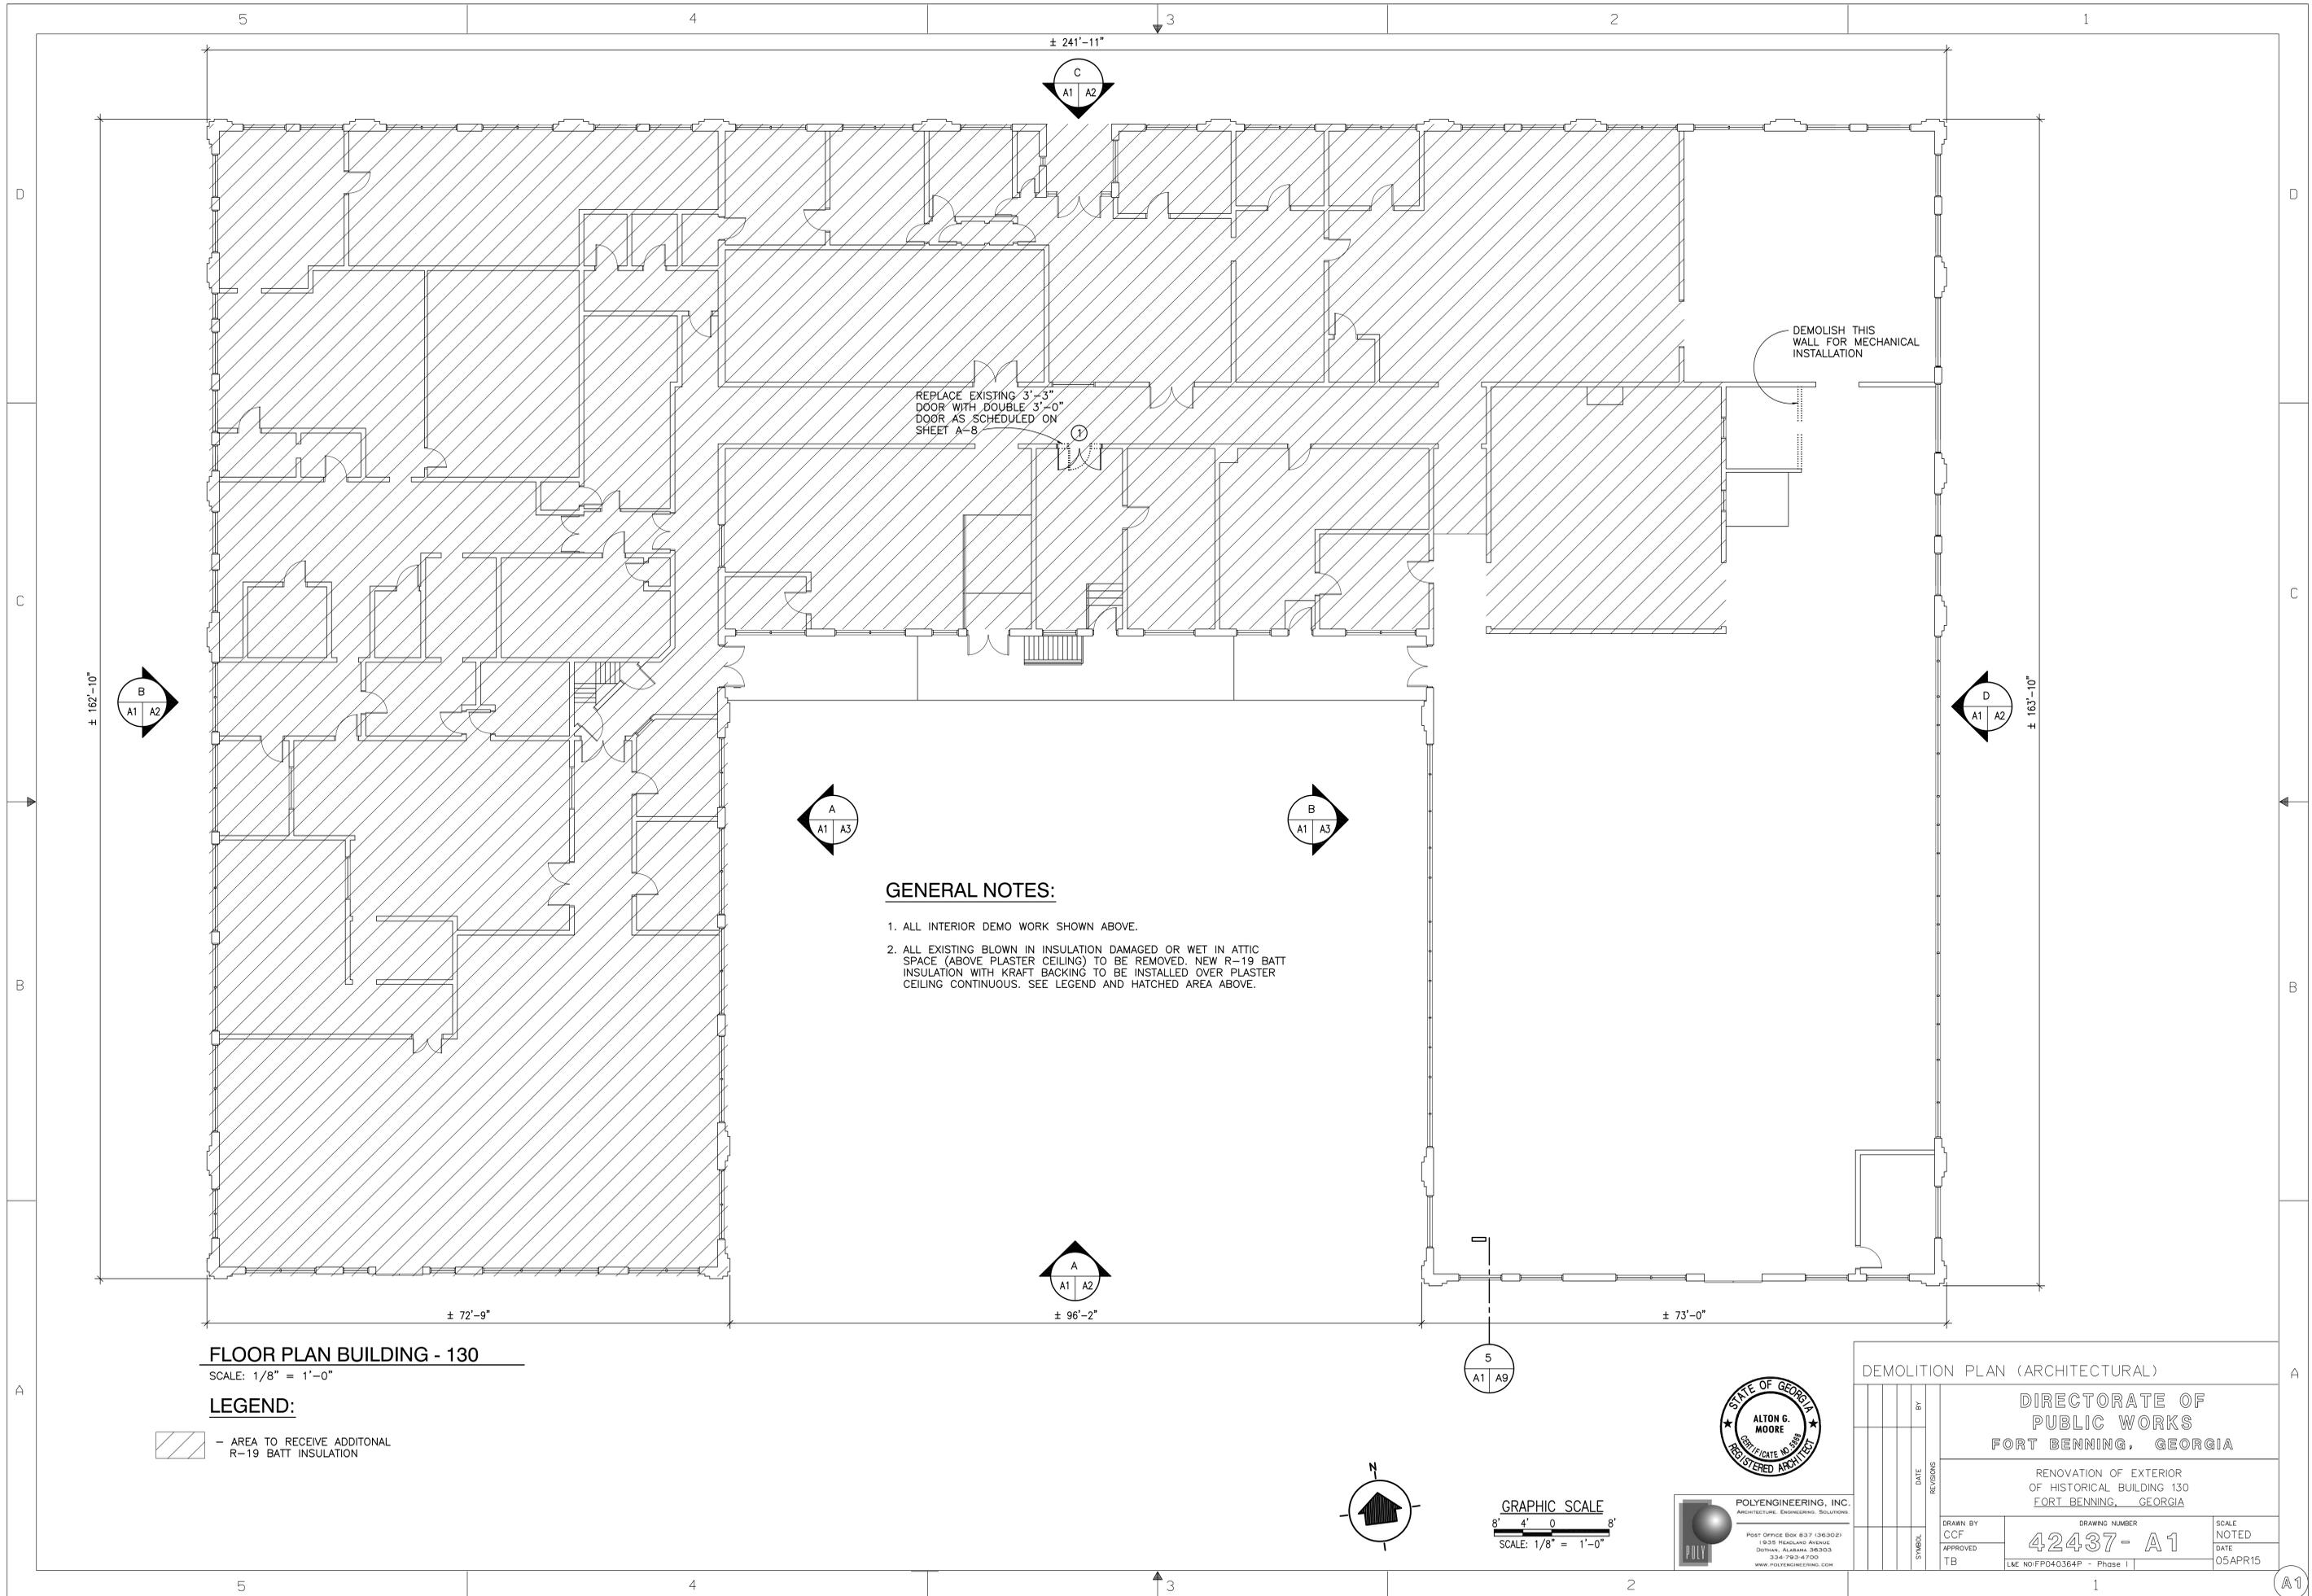

GENERAL NOTES:

1. ALL INTERIOR DEMO WORK SHOWN ABOVE.
2. ALL EXISTING BLOWN IN INSULATION DAMAGED OR WET IN ATTIC SPACE (ABOVE PLASTER CEILING) TO BE REMOVED. NEW R-19 BATT INSULATION WITH KRAFT BACKING TO BE INSTALLED OVER PLASTER CEILING CONTINUOUS. SEE LEGEND AND HATCHED AREA ABOVE.

FLOOR PLAN BUILDING - 130

SCALE: 1/8" = 1'-0"

LEGEND:

- AREA TO RECEIVE ADDITIONAL R-19 BATT INSULATION



POLYENGINEERING, INC.
 ARCHITECTURE, ENGINEERING, SOLUTIONS
 Post Office Box 837 1363021
 1939 HIGHLAND AVENUE
 DOTHAN, ALABAMA 36503
 334-793-4700
 WWW.POLYENGINEERING.COM



GRAPHIC SCALE
 8' 4' 0' 8'
 SCALE: 1/8" = 1'-0"

DEMOLITION PLAN (ARCHITECTURAL)		DIRECTORATE OF PUBLIC WORKS FORT BENNING, GEORGIA	
RENOVATION OF EXTERIOR OF HISTORICAL BUILDING 130 FORT BENNING, GEORGIA		DRAWN BY CCF	DRAWING NUMBER 42437- A1
APPROVED TB	DATE REVISIONS	SCALE NOTED DATE 05APR15	L&E NO:FP040364P - Phase 1



A
ELEVATION BUILDING - 130
SCALE: 1/8" = 1'-0"


B
ELEVATION BUILDING - 130
SCALE: 1/8" = 1'-0"

C
ELEVATION BUILDING - 130
SCALE: 1/8" = 1'-0"

D
ELEVATION BUILDING - 130
SCALE: 1/8" = 1'-0"

LEGEND:

- PHOTOGRAPHIC REFERENCE SYMBOL
SEE SHEET A-4 FOR ACTUAL PHOTOS
TYPICAL FOR ALL SIMILAR CONDITIONS
AND LOCATIONS ON BUILDING.



POLYENGINEERING, INC.
ARCHITECTURE, ENGINEERING, SOLUTIONS
Post Office Box 837 (36302)
1939 HEADLAND AVENUE
DOTHAN, ALABAMA 36303
334-793-4700
WWW.POLYENGINEERING.COM

ELEVATIONS		BY	
		DIRECTORATE OF PUBLIC WORKS FORT BENNING, GEORGIA	
		RENOVATION OF EXTERIOR OF HISTORICAL BUILDING 130 FORT BENNING, GEORGIA	
		DRAWN BY CCF	DRAWING NUMBER 42437- A2
		APPROVED TB	SCALE NOTED DATE 05APR15
			L&E NO:FP040364P - Phase 1


5

4


3

2

1

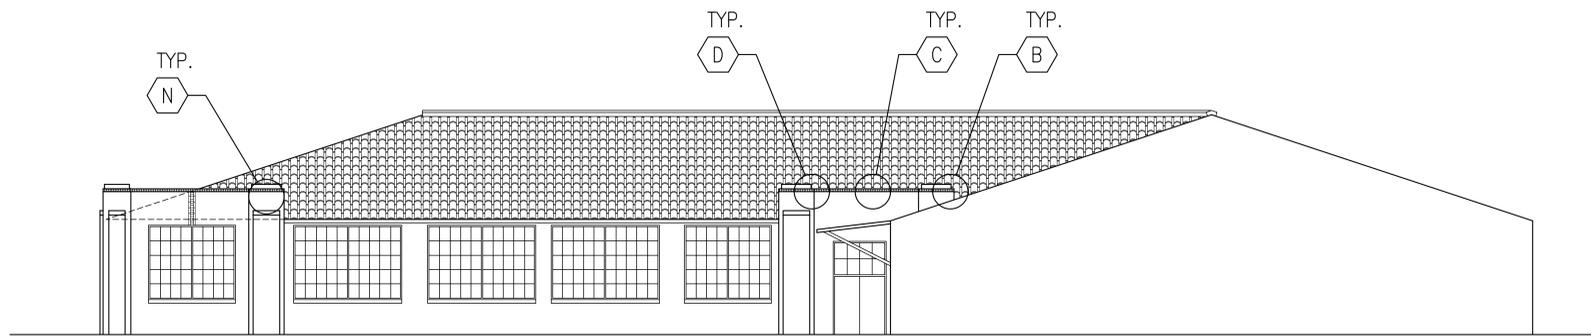

A
A1 A3 **ELEVATIONS - 130**
SCALE: 1/8" = 1'-0"

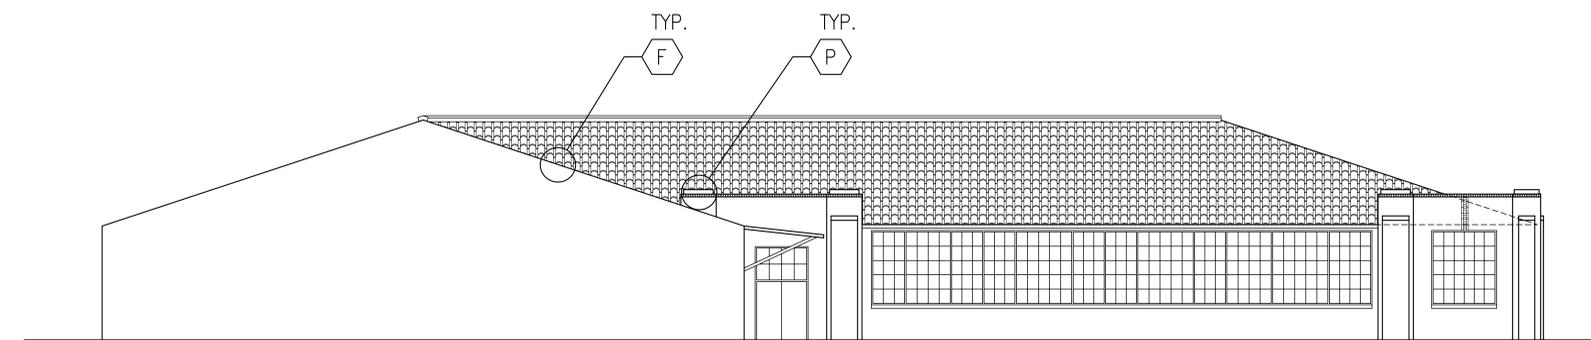


B
A1 A3 **ELEVATIONS - 130**
SCALE: 1/8" = 1'-0"

LEGEND:


- PHOTOGRAPHIC REFERENCE SYMBOL. SEE SHEET A-4 FOR ACTUAL PHOTOS TYPICAL FOR ALL SIMILAR CONDITIONS AND LOCATIONS ON BUILDING.

NOTES FOR EXISTING EXTERIOR WALLS:


1. PARAPETS SHALL BE CORRECTED AS NOTED AND SPECIFIED.
2. ALL BRICK SHALL BE CLEANED AND REPOINTED AS SPECIFIED IN SECTION 04900 RESTORATION AND CLEANING OF MASONRY IN HISTORICAL STRUCTURES.
3. ALL EXTERIOR WALLS SHALL BE CLEANED AS SPECIFIED IN SECTION 09225 STUCCO.
4. ALL EXTERIOR WALLS SHALL BE REPAINTED AS PER SPECIFICATIONS SECTION 09900 PAINTS AND COATINGS. COLOR SHALL MATCH EXISTING AND BE APPROVED BY CONTRACTING OFFICER.
5. CARE SHALL BE TAKEN TO PROTECT EXISTING VEGETATION AND PLANTINGS.

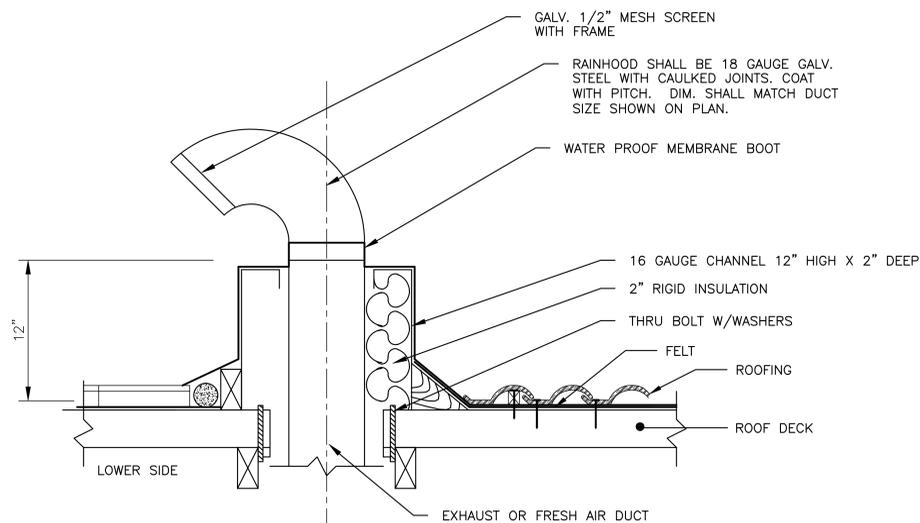


ROOF JACK DETAIL
N.T.S.

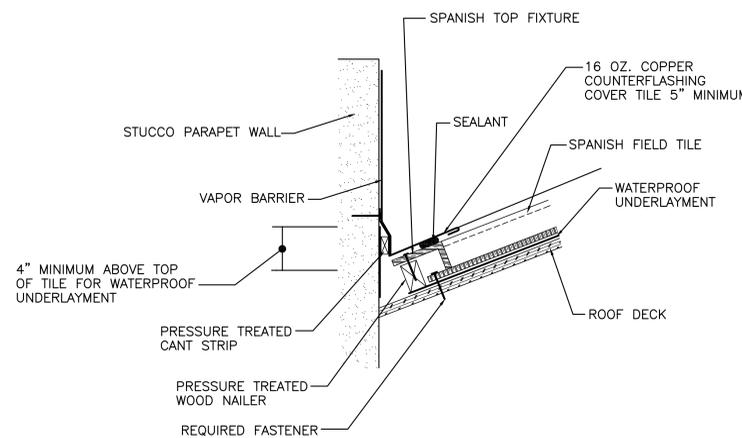

SECTION SHOWING FLASHING UNDER SPANISH TILES
N.T.S.

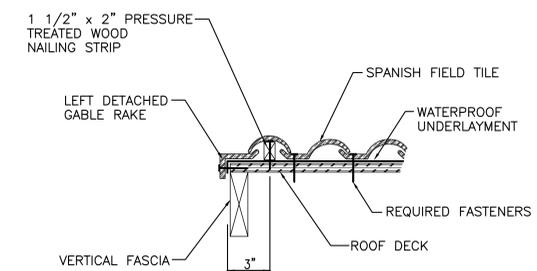

SECTION SHOWING LEFT GABLE RAKE AND END BAND TILE
N.T.S.



POLYENGINEERING, INC.
ARCHITECTURE, ENGINEERING, SOLUTIONS
POST OFFICE BOX 837 (36302)
1935 HEADLAND AVENUE
DOTHAN, ALABAMA 36303
334-793-4700
WWW.POLYENGINEERING.COM

ELEVATIONS		BY		DATE		REVISIONS		
<p align="center">DIRECTORATE OF PUBLIC WORKS FORT BENNING, GEORGIA</p> <p align="center">RENOVATION OF EXTERIOR OF HISTORICAL BUILDING 130 FORT BENNING, GEORGIA</p>				DRAWN BY	DRAWING NUMBER			SCALE
				CCF	42437-A3			NOTED
APPROVED	DATE			DATE		DATE		
TB	05APR15			05APR15		05APR15		
LKE NO:FP040364P - Phase 1								

A3

5

4

3

2

1

D

D

C


C

B

B

A

A

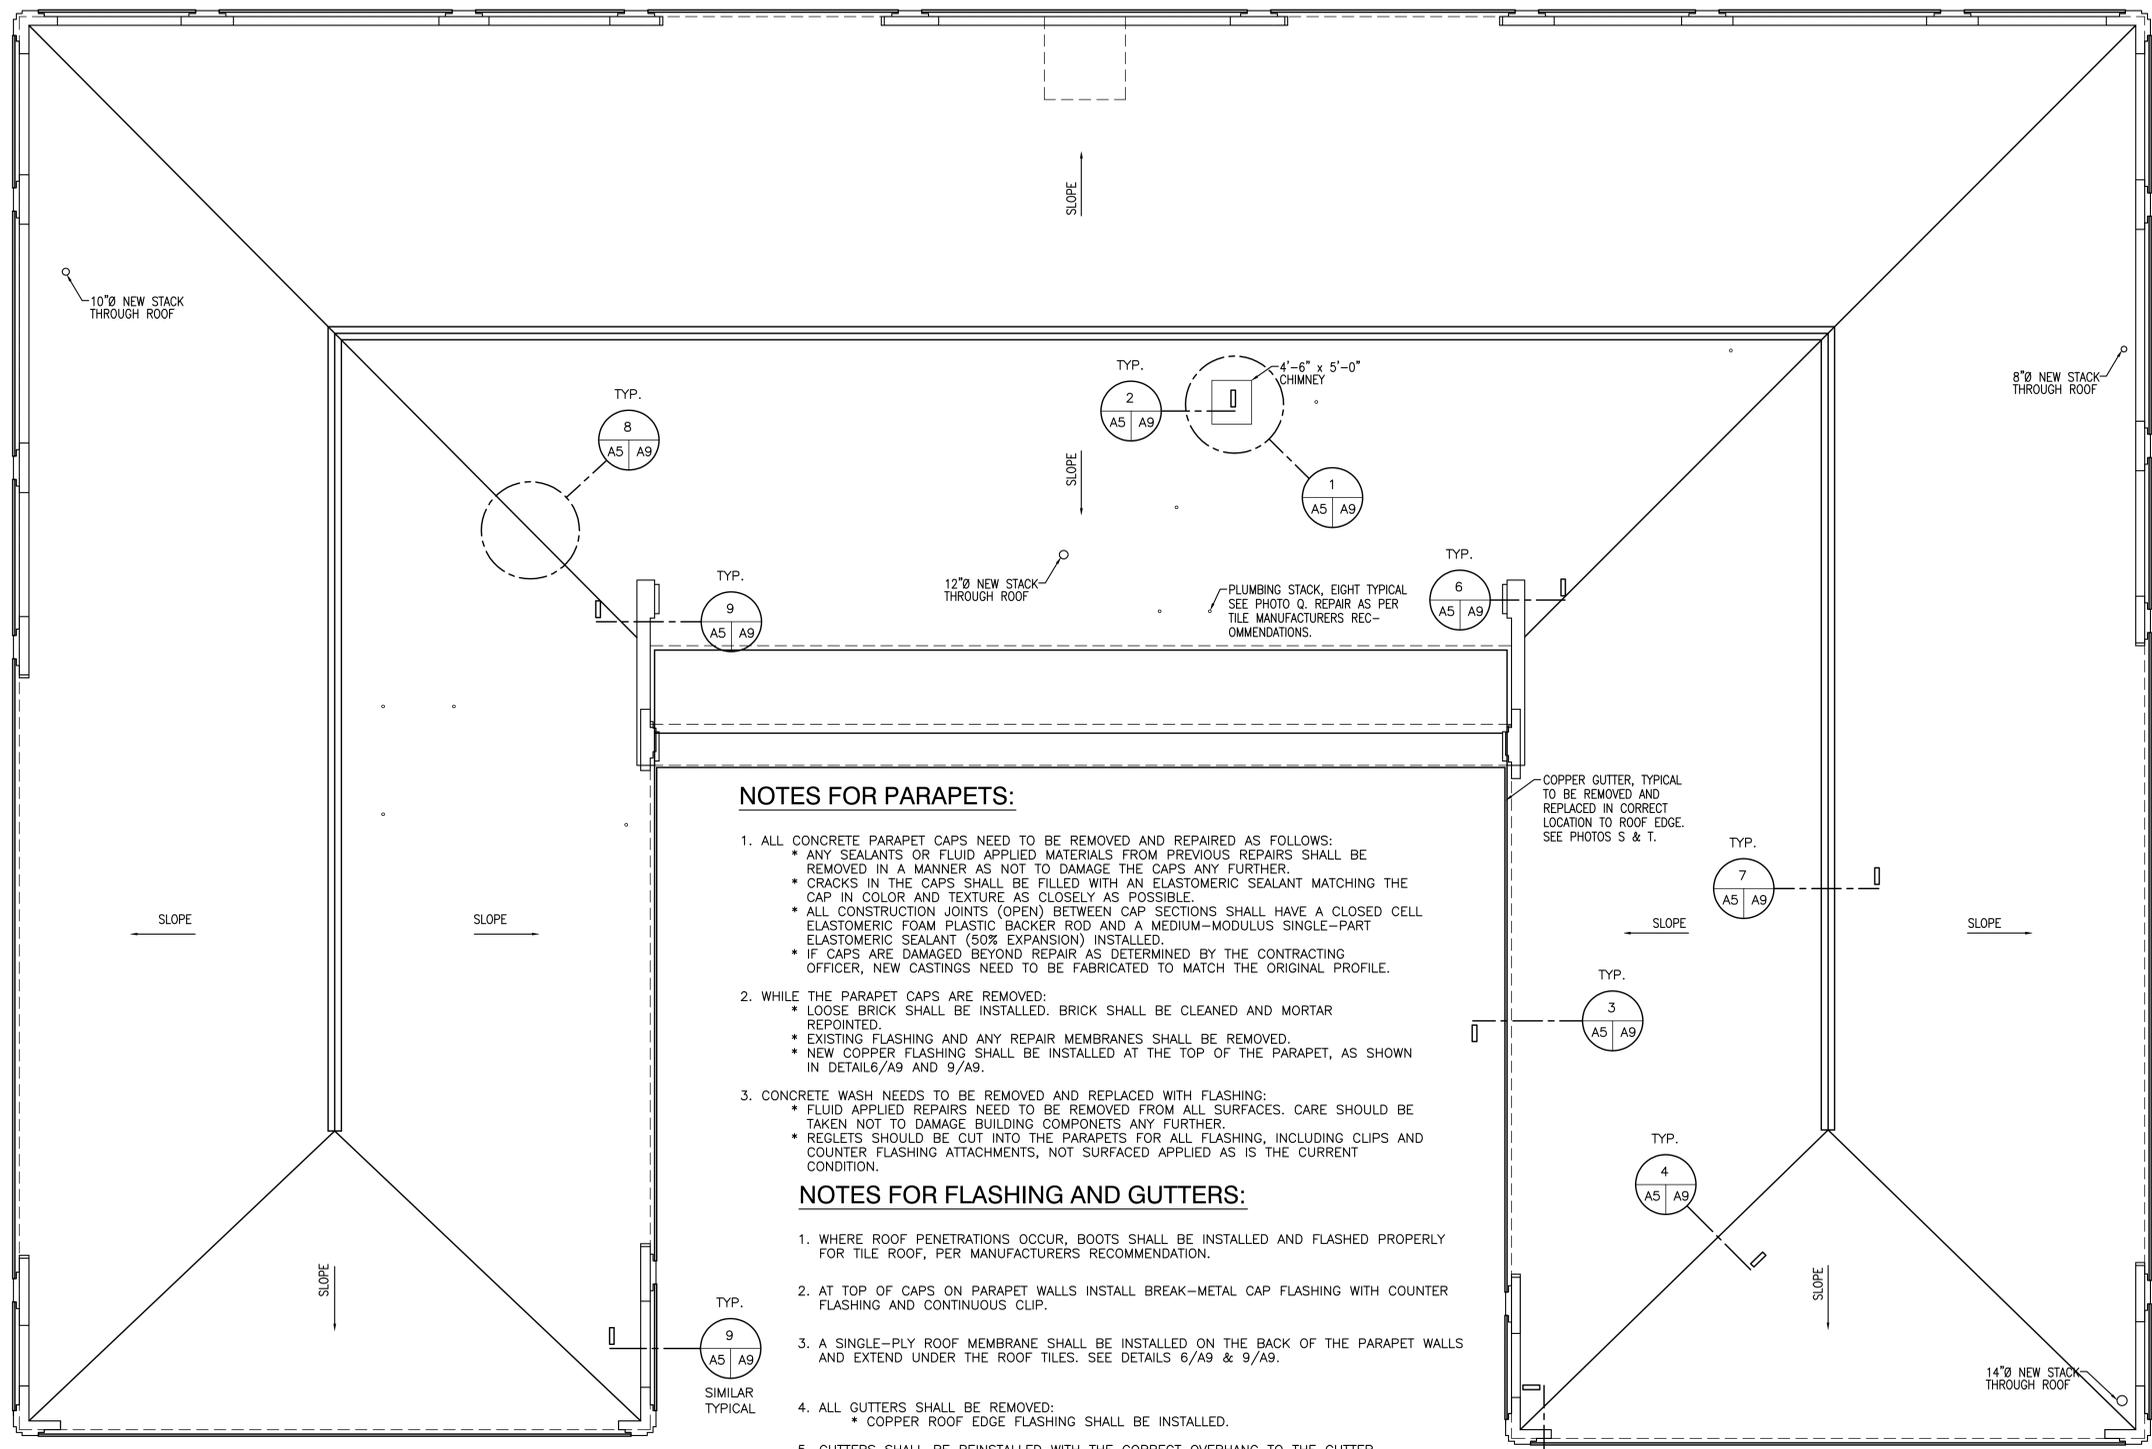

NOTES FOR PARAPETS:

- ALL CONCRETE PARAPET CAPS NEED TO BE REMOVED AND REPAIRED AS FOLLOWS:
 - ANY SEALANTS OR FLUID APPLIED MATERIALS FROM PREVIOUS REPAIRS SHALL BE REMOVED IN A MANNER AS NOT TO DAMAGE THE CAPS ANY FURTHER.
 - CRACKS IN THE CAPS SHALL BE FILLED WITH AN ELASTOMERIC SEALANT MATCHING THE CAP IN COLOR AND TEXTURE AS CLOSELY AS POSSIBLE.
 - ALL CONSTRUCTION JOINTS (OPEN) BETWEEN CAP SECTIONS SHALL HAVE A CLOSED CELL ELASTOMERIC FOAM PLASTIC BACKER ROD AND A MEDIUM-MODULUS SINGLE-PART ELASTOMERIC SEALANT (50% EXPANSION) INSTALLED.
 - IF CAPS ARE DAMAGED BEYOND REPAIR AS DETERMINED BY THE CONTRACTING OFFICER, NEW CASTINGS NEED TO BE FABRICATED TO MATCH THE ORIGINAL PROFILE.
- WHILE THE PARAPET CAPS ARE REMOVED:
 - LOOSE BRICK SHALL BE INSTALLED. BRICK SHALL BE CLEANED AND MORTAR REPOINTED.
 - EXISTING FLASHING AND ANY REPAIR MEMBRANES SHALL BE REMOVED.
 - NEW COPPER FLASHING SHALL BE INSTALLED AT THE TOP OF THE PARAPET, AS SHOWN IN DETAIL 6/A9 AND 9/A9.
- CONCRETE WASH NEEDS TO BE REMOVED AND REPLACED WITH FLASHING:
 - FLUID APPLIED REPAIRS NEED TO BE REMOVED FROM ALL SURFACES. CARE SHOULD BE TAKEN NOT TO DAMAGE BUILDING COMPONENTS ANY FURTHER.
 - REGLETS SHOULD BE CUT INTO THE PARAPETS FOR ALL FLASHING, INCLUDING CLIPS AND COUNTER FLASHING ATTACHMENTS, NOT SURFACED APPLIED AS IS THE CURRENT CONDITION.



NOTES FOR FLASHING AND GUTTERS:

- WHERE ROOF PENETRATIONS OCCUR, BOOTS SHALL BE INSTALLED AND FLASHED PROPERLY FOR TILE ROOF, PER MANUFACTURERS RECOMMENDATION.
- AT TOP OF CAPS ON PARAPET WALLS INSTALL BREAK-METAL CAP FLASHING WITH COUNTER FLASHING AND CONTINUOUS CLIP.
- A SINGLE-PLY ROOF MEMBRANE SHALL BE INSTALLED ON THE BACK OF THE PARAPET WALLS AND EXTEND UNDER THE ROOF TILES. SEE DETAILS 6/A9 & 9/A9.
- ALL GUTTERS SHALL BE REMOVED:
 - COPPER ROOF EDGE FLASHING SHALL BE INSTALLED.
- GUTTERS SHALL BE REINSTALLED WITH THE CORRECT OVERHANG TO THE GUTTER.

NOTES FOR ROOF TILES:

- REMOVE EXISTING ROOF TILES.
 - CARE SHOULD BE TAKEN TO REMOVE TILES AND STACK AS NOT TO DAMAGE. TILES TO BE TURNED OVER TO THE GOVERNMENT AT A LOCATION DETERMINED BY THE CONTRACTING OFFICER. NEW TILES SHALL BE STRAIGHT BARRELL MISSION ROOFING TILE, MADE BY LUDOWICI-CELADON COMPANY WITH STOCK FITTINGS SHALL BE USED. COLOR SHALL MATCH EXISTING AS CLOSELY AS POSSIBLE. PATTERN SHALL BE RANDOM EXPOSURE.
- INSTALL A 40# FELT UNDERLAYMENT LAID PARALLEL TO EAVE AND RIDGE, LAPPED 2-1/2" HORIZONTALLY, 6" VERTICALLY, CARRIED UP 6" AGAINST ALL VERTICAL WALLS, 4" OVER GUTTER AND VALLEY METAL AND FASTEN WITH GALVANIZED LARGE HEAD NAILS. WATERPROOF UNDERLAYMENT AND PVC MEMBRANE TO BE INSTALLED AS DETAILED.
- APPLY ON HIPS AND RIDGES 1" WOOD STRINGERS OF PROPER HEIGHT TO CARRY HIP ROLL AND RIDGE AND 1"x4" STRIPS SPACED TO SUIT COVERS LAID AT RANDOM EXPOSURE STRIPS.

ROOF PLAN BUILDING - 130
SCALE: 1/8" = 1'-0"



POLYENGINEERING, INC.
ARCHITECTURE, ENGINEERING, SOLUTIONS
Post Office Box 837 (36302)
1939 HEADLAND AVENUE
DOTHAN, ALABAMA 36303
334-793-4700
WWW.POLYENGINEERING.COM

ROOF PLAN		BY		DATE		REVISIONS	
DIRECTORATE OF PUBLIC WORKS FORT BENNING, GEORGIA				RENOVATION OF EXTERIOR OF HISTORICAL BUILDING 130 FORT BENNING, GEORGIA			
				DRAWN BY CCF	DRAWING NUMBER 42437-A5	SCALE NOTED	DATE 05APR15
APPROVED TB		L&E NO:FP040364P - Phase 1					

A5

5

4


3

2

1

D


D

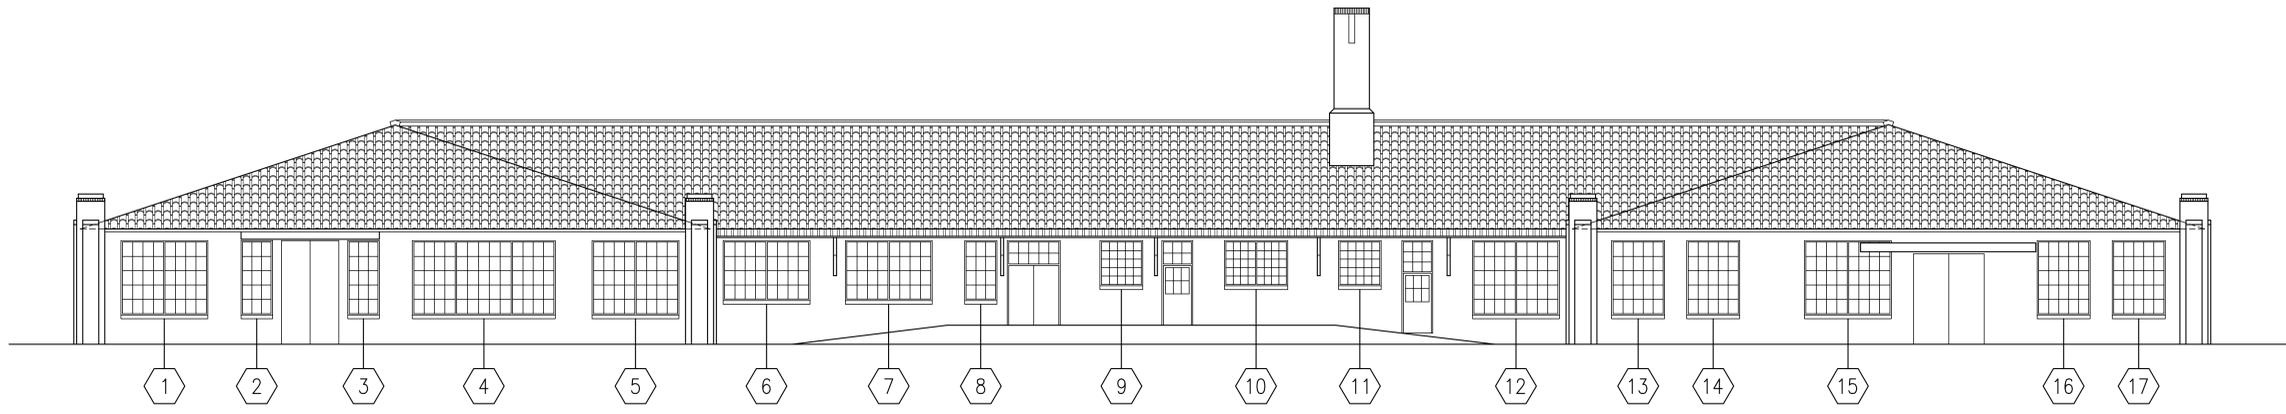

ELEVATION BUILDING - 130
 SCALE: 1/8" = 1'-0"

C

C

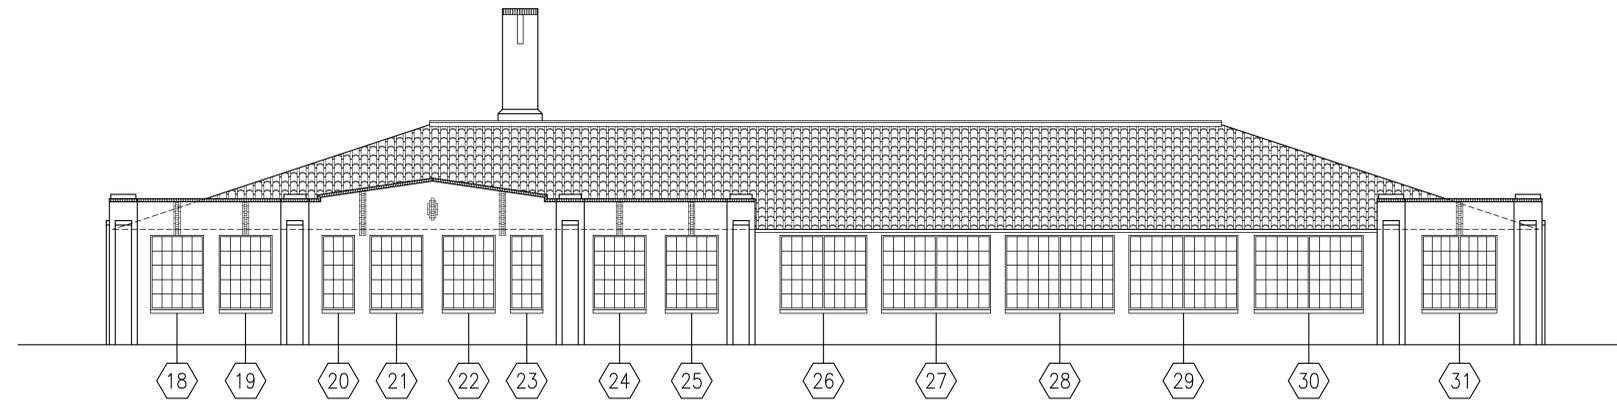


ELEVATION BUILDING - 130
 SCALE: 1/8" = 1'-0"

LEGEND:
 8 - WINDOW OPENING NUMBER REFERENCE SYMBOL. SEE SHEET A-8 FOR WINDOW SCHEDULE, WINDOW ELEVATIONS AND NOTES. SEE DETAIL 5/A9 FOR REFERENCE WORK ON ALL OPENINGS.

B

B

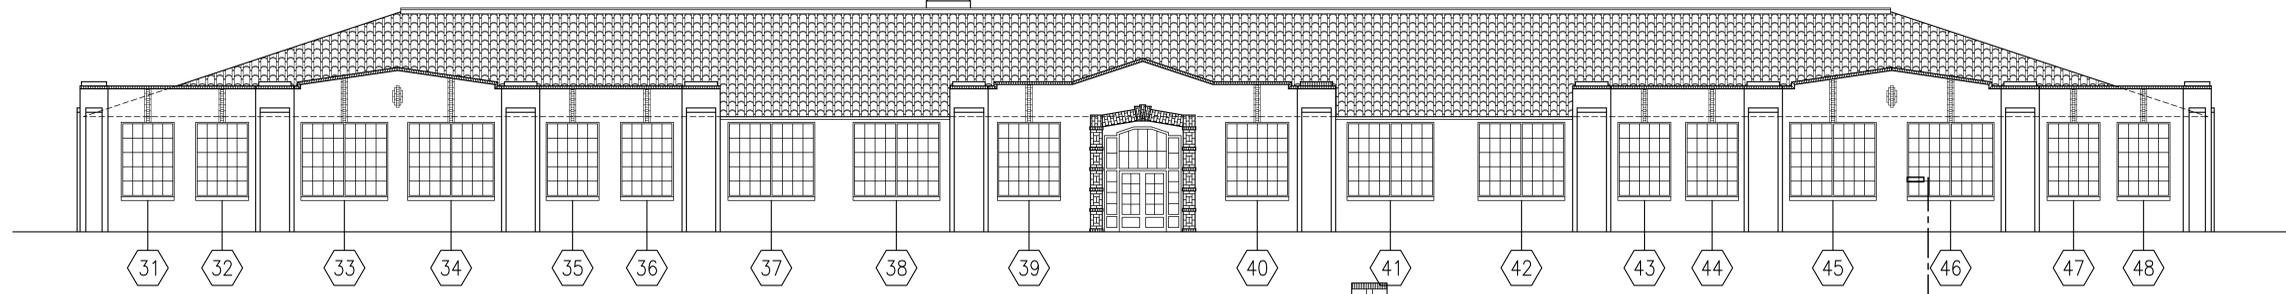


ELEVATION BUILDING - 130
 SCALE: 1/8" = 1'-0"

5
 A6 A9
 TYPICAL

A

A

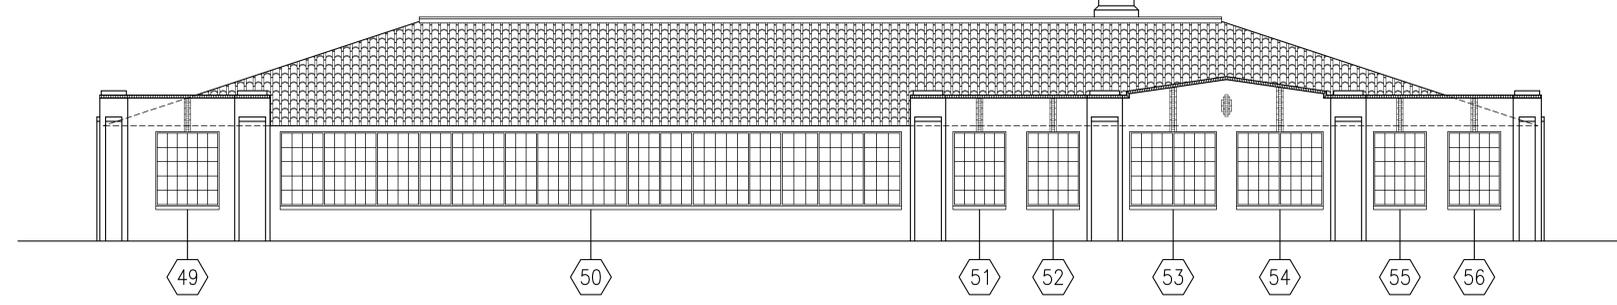

ELEVATION BUILDING - 130
 SCALE: 1/8" = 1'-0"

GRAPHIC SCALE
 8' 4' 0' 8'
 SCALE: 1/8" = 1'-0"



POLYENGINEERING, INC.
 ARCHITECTURE, ENGINEERING, SOLUTIONS
 Post Office Box 837 (36302)
 1935 HAZLARD AVENUE
 DOTHAN, ALABAMA 36028
 334-793-4700
 WWW.POLYENGINEERING.COM

WINDOW ELEVATIONS		BY	
		CCF	
		APPROVED	
		TB	
		DATE	
		REVISIONS	
		SYMBOL	
		DRAWING NUMBER	
		SCALE NOTED	
		DATE	
		05APR15	

DIRECTORATE OF PUBLIC WORKS
 FORT BENNING, GEORGIA

RENOVATION OF EXTERIOR OF HISTORICAL BUILDING 130
 FORT BENNING, GEORGIA

DRAWING NUMBER: **42437-A6**

L&E NO:FP040364P - Phase 1

5

4

3

2

1

A6


5

4


3

2

1

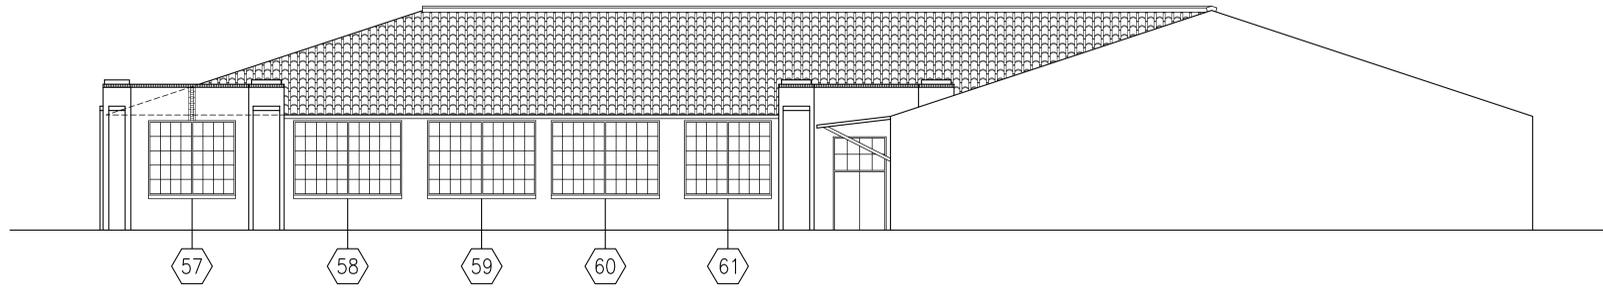

A
A1 | A7 **ELEVATIONS - 130**
SCALE: 1/8" = 1'-0"

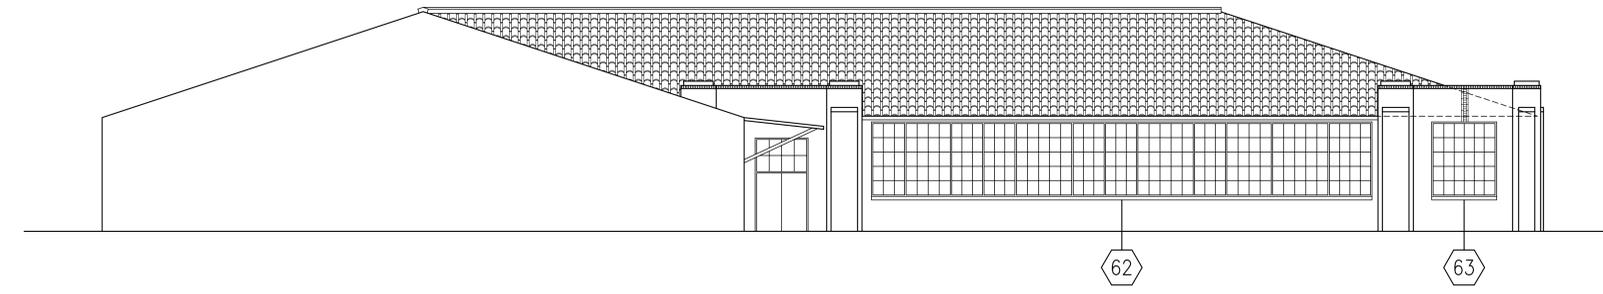

B
A1 | A7 **ELEVATIONS - 130**
SCALE: 1/8" = 1'-0"

LEGEND:
 - WINDOW OPENING NUMBER
 REFERENCE SYMBOL. SEE SHEET
 A-8 FOR WINDOW SCHEDULE,
 WINDOW ELEVATIONS AND NOTES.
 SEE DETAIL 5/A9 FOR REFERENCE
 WORK ON ALL OPENINGS.

D

D

C

C

B

B

A

A

5

4

3

2

1


A7




GRAPHIC SCALE
 8' 4' 0' 8'
 SCALE: 1/8" = 1'-0"

POLYENGINEERING, INC.
 ARCHITECTURE. ENGINEERING. SOLUTIONS.
 Post Office Box 837 (36302)
 1939 HEADLAND AVENUE
 DOTHAN, ALABAMA 36303
 334-793-4700
 WWW.POLYENGINEERING.COM


WINDOW ELEVATIONS		BY		
		DIRECTORATE OF PUBLIC WORKS FORT BENNING, GEORGIA		
		RENOVATION OF EXTERIOR OF HISTORICAL BUILDING 130 FORT BENNING, GEORGIA		
		DRAWN BY CCF APPROVED TB	DRAWING NUMBER 42437-A7	SCALE NOTED DATE 05APR15
		L&E NO:FP040364P - Phase 1		

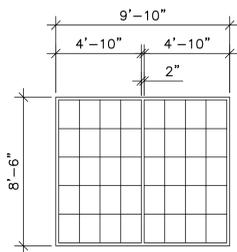


WINDOW TYPE "A"
SCALE: 1/4" = 1'-0"




WINDOW TYPE "B"
SCALE: 1/4" = 1'-0"

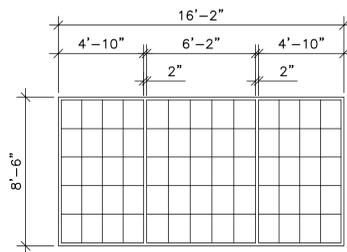


WINDOW TYPE "C"
SCALE: 1/4" = 1'-0"

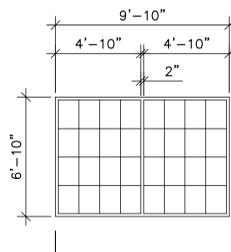


WINDOW TYPE "D"
SCALE: 1/4" = 1'-0"



WINDOW TYPE "E"
SCALE: 1/4" = 1'-0"




WINDOW TYPE "F"
SCALE: 1/4" = 1'-0"




DOOR TYPE "1"
SCALE: 1/4" = 1'-0"


NOTE DOOR HARDWARE TO MATCH EXISTING BY MANUFACTURER AND FINISH.
NEW HARDWARE REQUIRED AS FOLLOWS:
6 EA. HINGES
1 EA. LOCK
2 EA. FLUSHBOLTS
2 EA. STOPS
(DOME OR WALL AS NEEDED)




WINDOW TYPE "G"
SCALE: 1/4" = 1'-0"




WINDOW TYPE "H"
SCALE: 1/4" = 1'-0"




WINDOW TYPE "I"
SCALE: 1/4" = 1'-0"

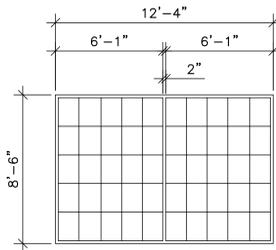


WINDOW TYPE "J"
SCALE: 1/4" = 1'-0"

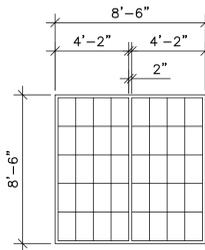

WINDOW TYPE "K"
SCALE: 1/4" = 1'-0"

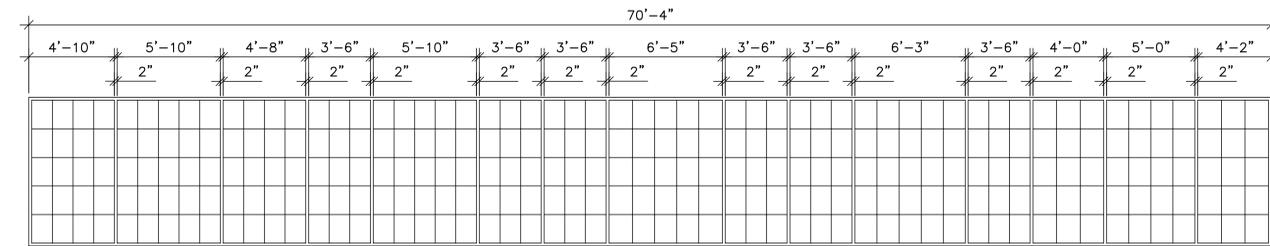

WINDOW TYPE "L"
SCALE: 1/4" = 1'-0"

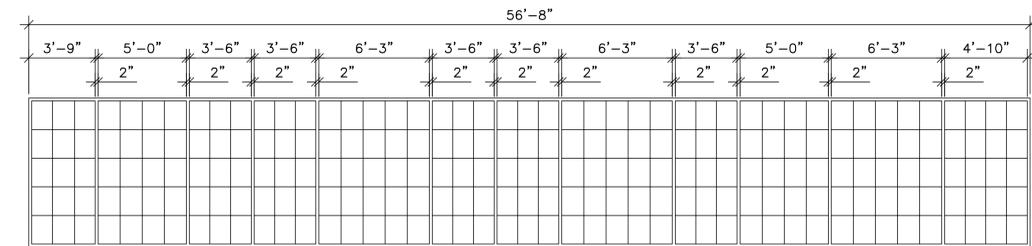


WINDOW TYPE "M"
SCALE: 1/4" = 1'-0"

WINDOW SCHEDULE

OPENING NUMBER	TYPE								
1	A	14	H	27	J	40	I	53	A
2	B	15	A	28	J	41	A	54	A
3	B	16	H	29	J	42	A	55	H
4	C	17	H	30	J	43	H	56	H
5	A	18	H	31	K	44	H	57	A
6	D	19	H	32	H	45	A	58	J
7	D	20	B	33	A	46	A	59	J
8	E	21	H	34	A	47	H	60	J
9	F	22	H	35	H	48	H	61	A
10	G	23	B	36	H	49	I	62	M
11	F	24	H	37	A	50	L	63	I
12	A	25	H	38	A	51	H		
13	H	26	A	39	I	52	H		


NOTES FOR WINDOWS AND SILLS:

- EXISTING STEEL FRAME WINDOWS SHALL BE REMOVED. WINDOWS SHALL BE REPAIRED AS FOLLOWS:
 - * CLEAR AWAY ALL RUST AND DEBRIS AND RUB THE WINDOWS WITH MINERAL SPIRITS OR DENATYRED ALCOHOL.
 - * REMOVE LIGHT RUST BY AN ACCEPTED MANUAL OR MECHANICAL PROCESS. PROTECT ADJACENT SURFACES.
 - * REMOVE ANY LOOSE PAINT USING A CHEMICAL PAINT REMOVER. ANY PAINT THAT IS ADHERING SOUNDLY SHOULD REMAIN UNLESS IT OREVENTS THE SMOOTH OPERATION OF THE WINDOW. FEATHER THE EDGES OF THESE AREAS TO PROVIDEA SMOOTH FINISH AND APPEARANCE.
 - * REPLACE BROKEN GLASS AND OR GLAZING PUTTY, USING GALZING COMPOUND SPECIFICALLY MADE FOR METAL WINDOWS. REPLACEMENT GLASS FOR THE BOTTOM TWO ROWS OF GLAZING ARE TO BE REPLACED WITH CLEAR GLASS WHILE THE UPPER ROWS SHALL BE REPLACED WITH A TINTED GLASS TO MATCH EXISTING TINTED GLASS THAT IS NOT REFLECTIVE OR MIRRORRED.
 - * TIGHTEN AND/OR REPLACE MISSING SCREWS AND FASTENERS. CLEAN AND LUBRICATE HINGES WITH A NON-GREASY LUBRICANT SPRAY MADE ESPECIALLY FOR METAL. ONE WITH AN ANTI-COROSIVE AGENT. IF MATCHING PARTS CAN NOT BE FOUNDAND A READY-MADE SUBSTITUTE MUST BE USED, FILL OLD HOLES WITH A STEEL EPOXY TO PREVENT WATER INFILTRATION.
 - * PAINT WINDOWS AS PER SPECIFICATIONS SECTION 09900.
 - * WEATHERSTRIPPING SHALL BE ADDED TO IMPROVE THE THERMAL EFFICIENT OF THE EXISTING METAL WINDOWS. WHERE POSSIBLE USE SPRING-METAL TYPE WEATHERSTRIPPING. OTHER TYPES INCLUDE VINYL STRIPS, FOAM TYPE AND SEALANT BEAD.
- CONCRETE WINDOW SILLS SHALL BE REMOVED. SILL SHALL BE REPAIRED AS FOLLOWS:
 - * ANY SEALANTS FROM PREVIOUS REPAIRS SHALL BE REMOVED IN A MANNER AS NOT TO DAMAGE THE SILL ANY FURTHER.
 - * CRACKS IN THE SILL SHALL BE FILLED WITH AN ELASTOMERIC SEALANT MATCHING THE SILL IN COLOR AND TEXTURE AS CLOSELY AS POSSIBLE.
 - * ALL CONSTRUCTION JOINTS (OPEN) BETWEEN SILL SECTIONS SHALL HAVE A CLOSED CELL ELASTOMERIC FOAM PLASTIC BACKER ROD AND A MEDIUM-MODULUS SINGLE-PART ELASTOMERIC SEALANT (50% EXPANSION) INSTALLED.
- NEW COPPER FLASHING SHALL BE INSTALLED IN ALL WINDOW OPENINGS AT THE HEAD, JAMB AND SILL. FLASHING SHALL BE AS SPECIFIED. SILL FLASHING SHALL HAVE END DAMS.
- SILL SHALL BE REINSTALLED.
- WINDOWS SHALL BE REINSTALLED. A QUALITY POLYURETHANE, VINYL ACRYLIC OR BUTYL RUBBER CAULK MADE FOR EXTERIOR USE SHALL BE APPLIED AROUND THE EXTERIOR OF ALL WINDOWS.
- ALL INTERIOR SILL SHALL BE CHECKED TO INSURE THAT WATER DOES NOT STAND ON THE SILLS BUT HAS A PATH TO EXIT THE BUILDING.
- ALL EXISTING LOUVERS IN WINDOW OPENINGS TO BE REMOVED. SEE MECHANICAL AND SHEET A-5 FOR NEW ROOF PENETRATION LOCATIONS AND DUCT ROUTING.
- ALL WINDOW SCHEDULED TO RECEIVE WORK AS DESCRIBED IN ABOVE NOTES AND DETAILED IN DETAIL 5/A-9.




POLYENGINEERING, INC.
ARCHITECTURE, ENGINEERING, SOLUTIONS
Post Office Box 837 (36302)
1939 HAZLARD AVENUE
DOTHAN, ALABAMA 36503
334-793-4700
WWW.POLYENGINEERING.COM


WINDOW TYPES AND SCHEDULES		BY	
DIRECTORATE OF PUBLIC WORKS FORT BENNING, GEORGIA			
RENOVATION OF EXTERIOR OF HISTORICAL BUILDING 130 FORT BENNING, GEORGIA			
DRAWN BY CCF	DRAWING NUMBER 42437-A8	SCALE NOTED	DATE 05APR15
APPROVED TB			
LKE NO:FP040364P - Phase 1			

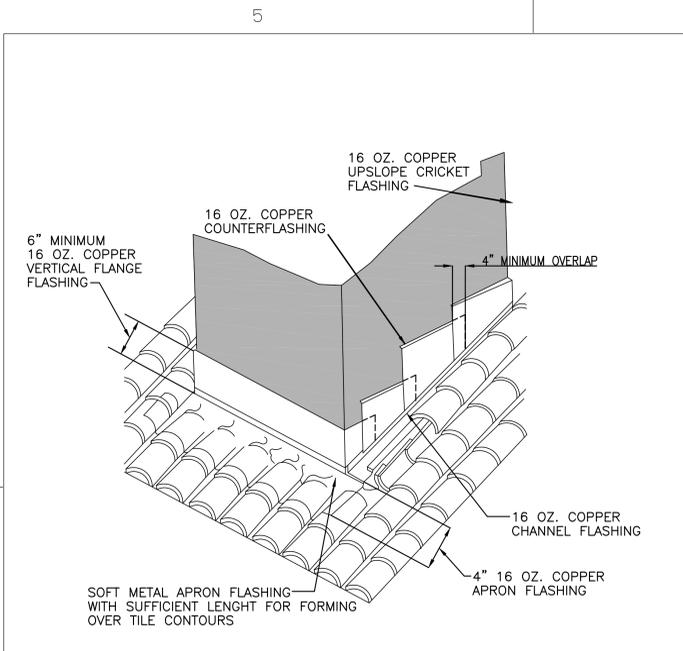


1 NEW CHIMNEY FLASHING WITH MISSION TILE
A5 | A9 NOT TO SCALE

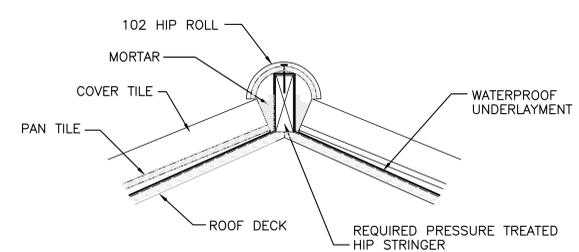


4 HIP SECTION SHOWING NEW HIP ROLL
A5 | A9 NOT TO SCALE

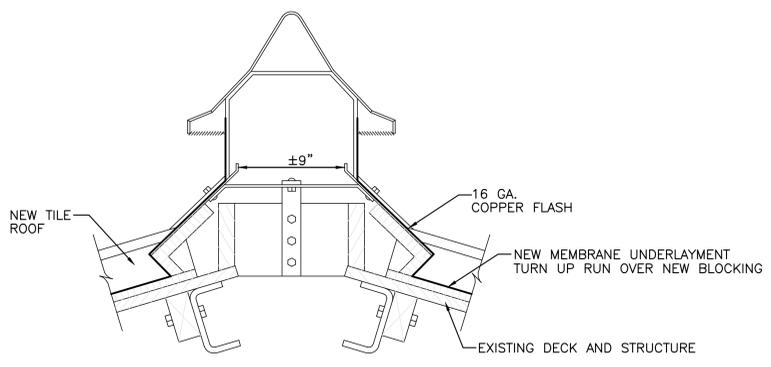


7 NEW VENTILATOR
A5 | A9 NOT TO SCALE

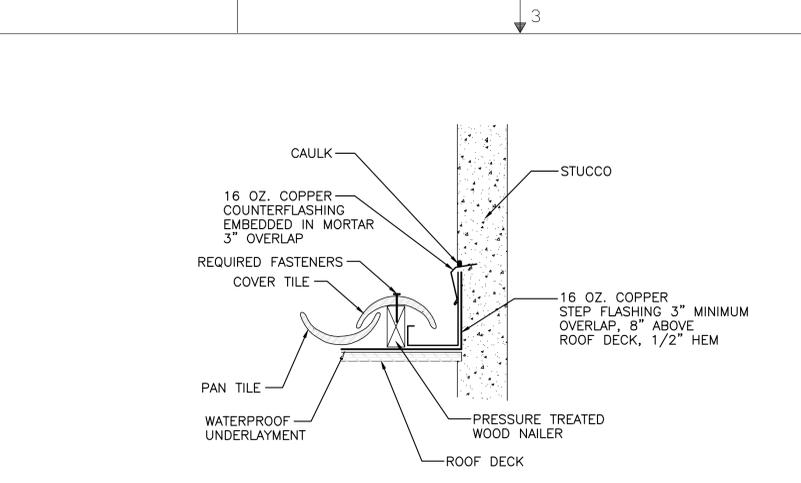


2 SECTION SHOWING NEW FLASHING AT CHIMNEY
A5 | A9 NOT TO SCALE

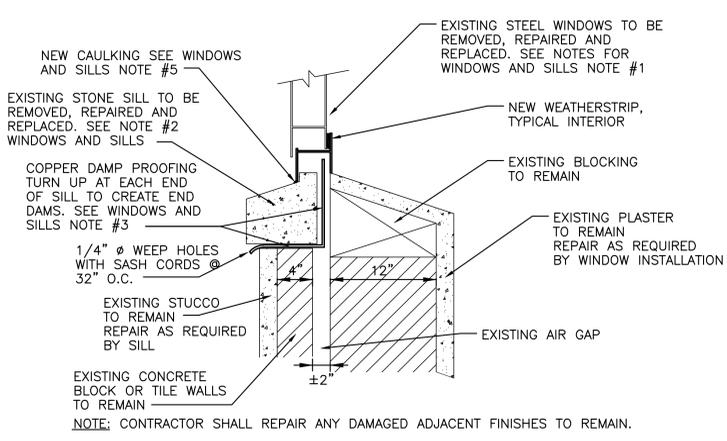


5 NEW SILL FLASHING AND REINSTALLATION DETAIL
A1 | A9 NOT TO SCALE
A6

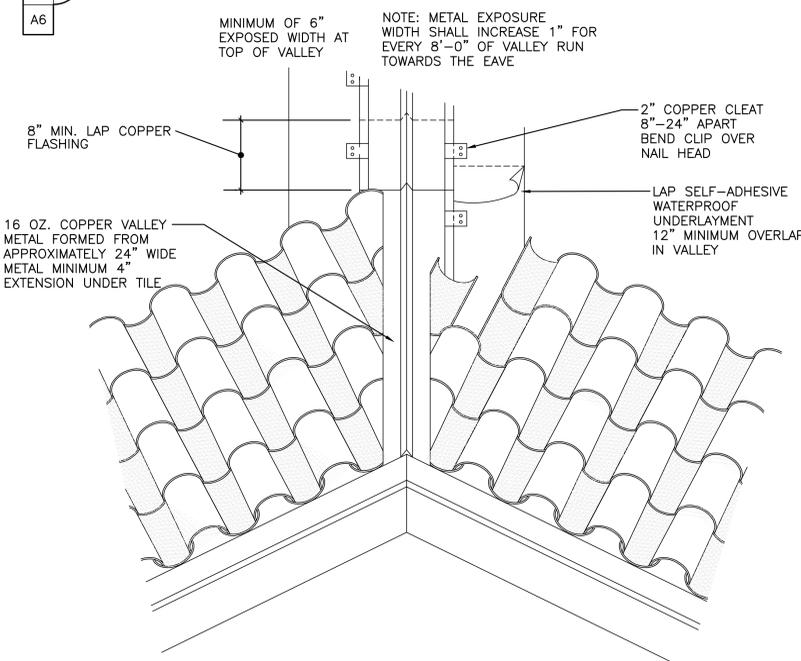


8 TYPICAL NEW OPEN VALLEY FLASHING FOR PAN AND COVER TILES
A5 | A9 NOT TO SCALE

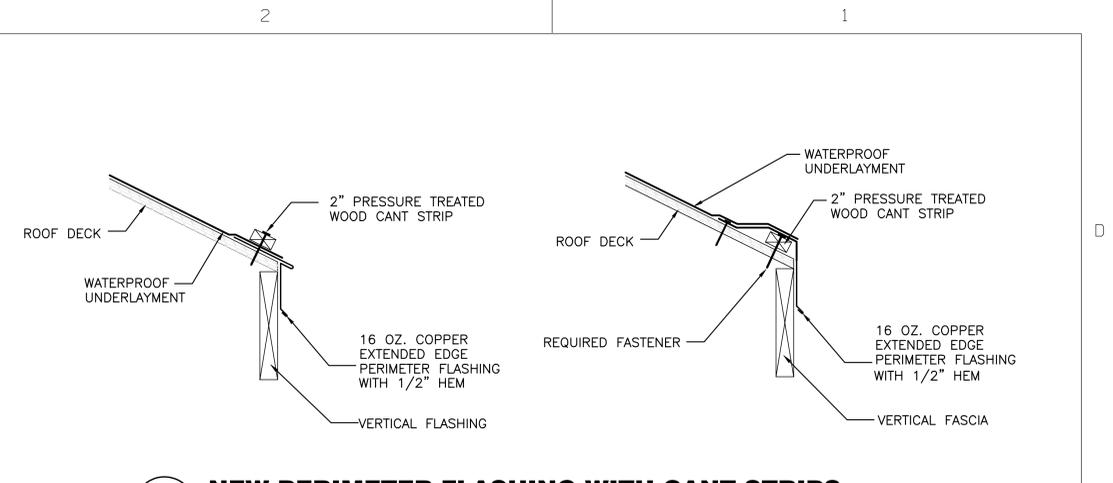

3 NEW PERIMETER FLASHING WITH CANT STRIPS
A5 | A9 NOT TO SCALE

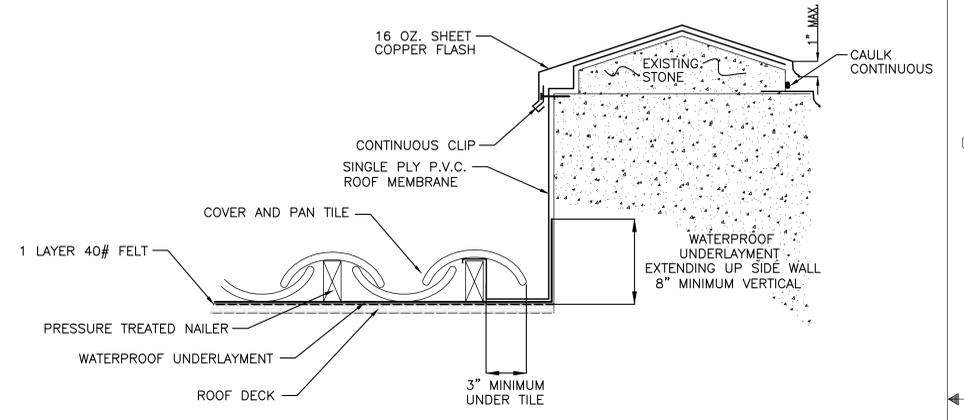

6 NEW CHANNEL FLASHING WITH PAN AND COVER TILES DETAIL FLASHING AT HIGH PARAPET
A5 | A9 NOT TO SCALE

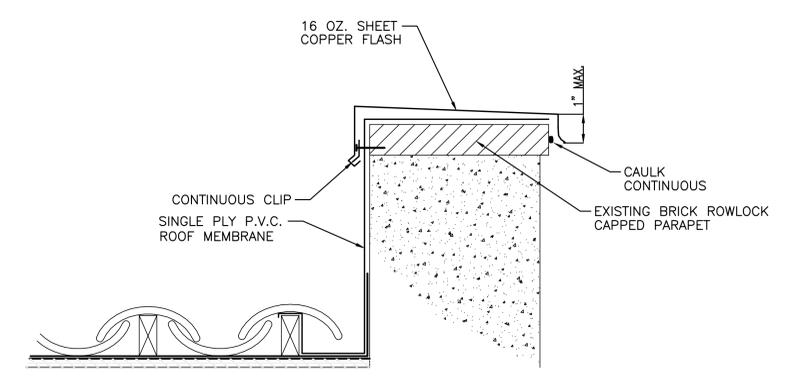


9 DETAIL NEW FLASHING AT LOW PARAPET
A5 | A9 NOT TO SCALE



POLYENGINEERING, INC.
ARCHITECTURE, ENGINEERING, SOLUTIONS
Post Office Box 837 (36302)
1939 HEADLAND AVENUE
DOTHAN, ALABAMA 36028
334-793-4700
WWW.POLYENGINEERING.COM

FLASHING AND ROOF DETAILS		BY	
<p align="center">DIRECTORATE OF PUBLIC WORKS FORT BENNING, GEORGIA</p> <p align="center">RENOVATION OF EXTERIOR OF HISTORICAL BUILDING 130 FORT BENNING, GEORGIA</p>		DATE	REVISIONS
		SYMBOL	
DRAWN BY	APPROVED	DRAWING NUMBER	SCALE NOTED
CCF	TB	42437-A9	DATE 05APR15
LKE NO:FP040364P - Phase 1			

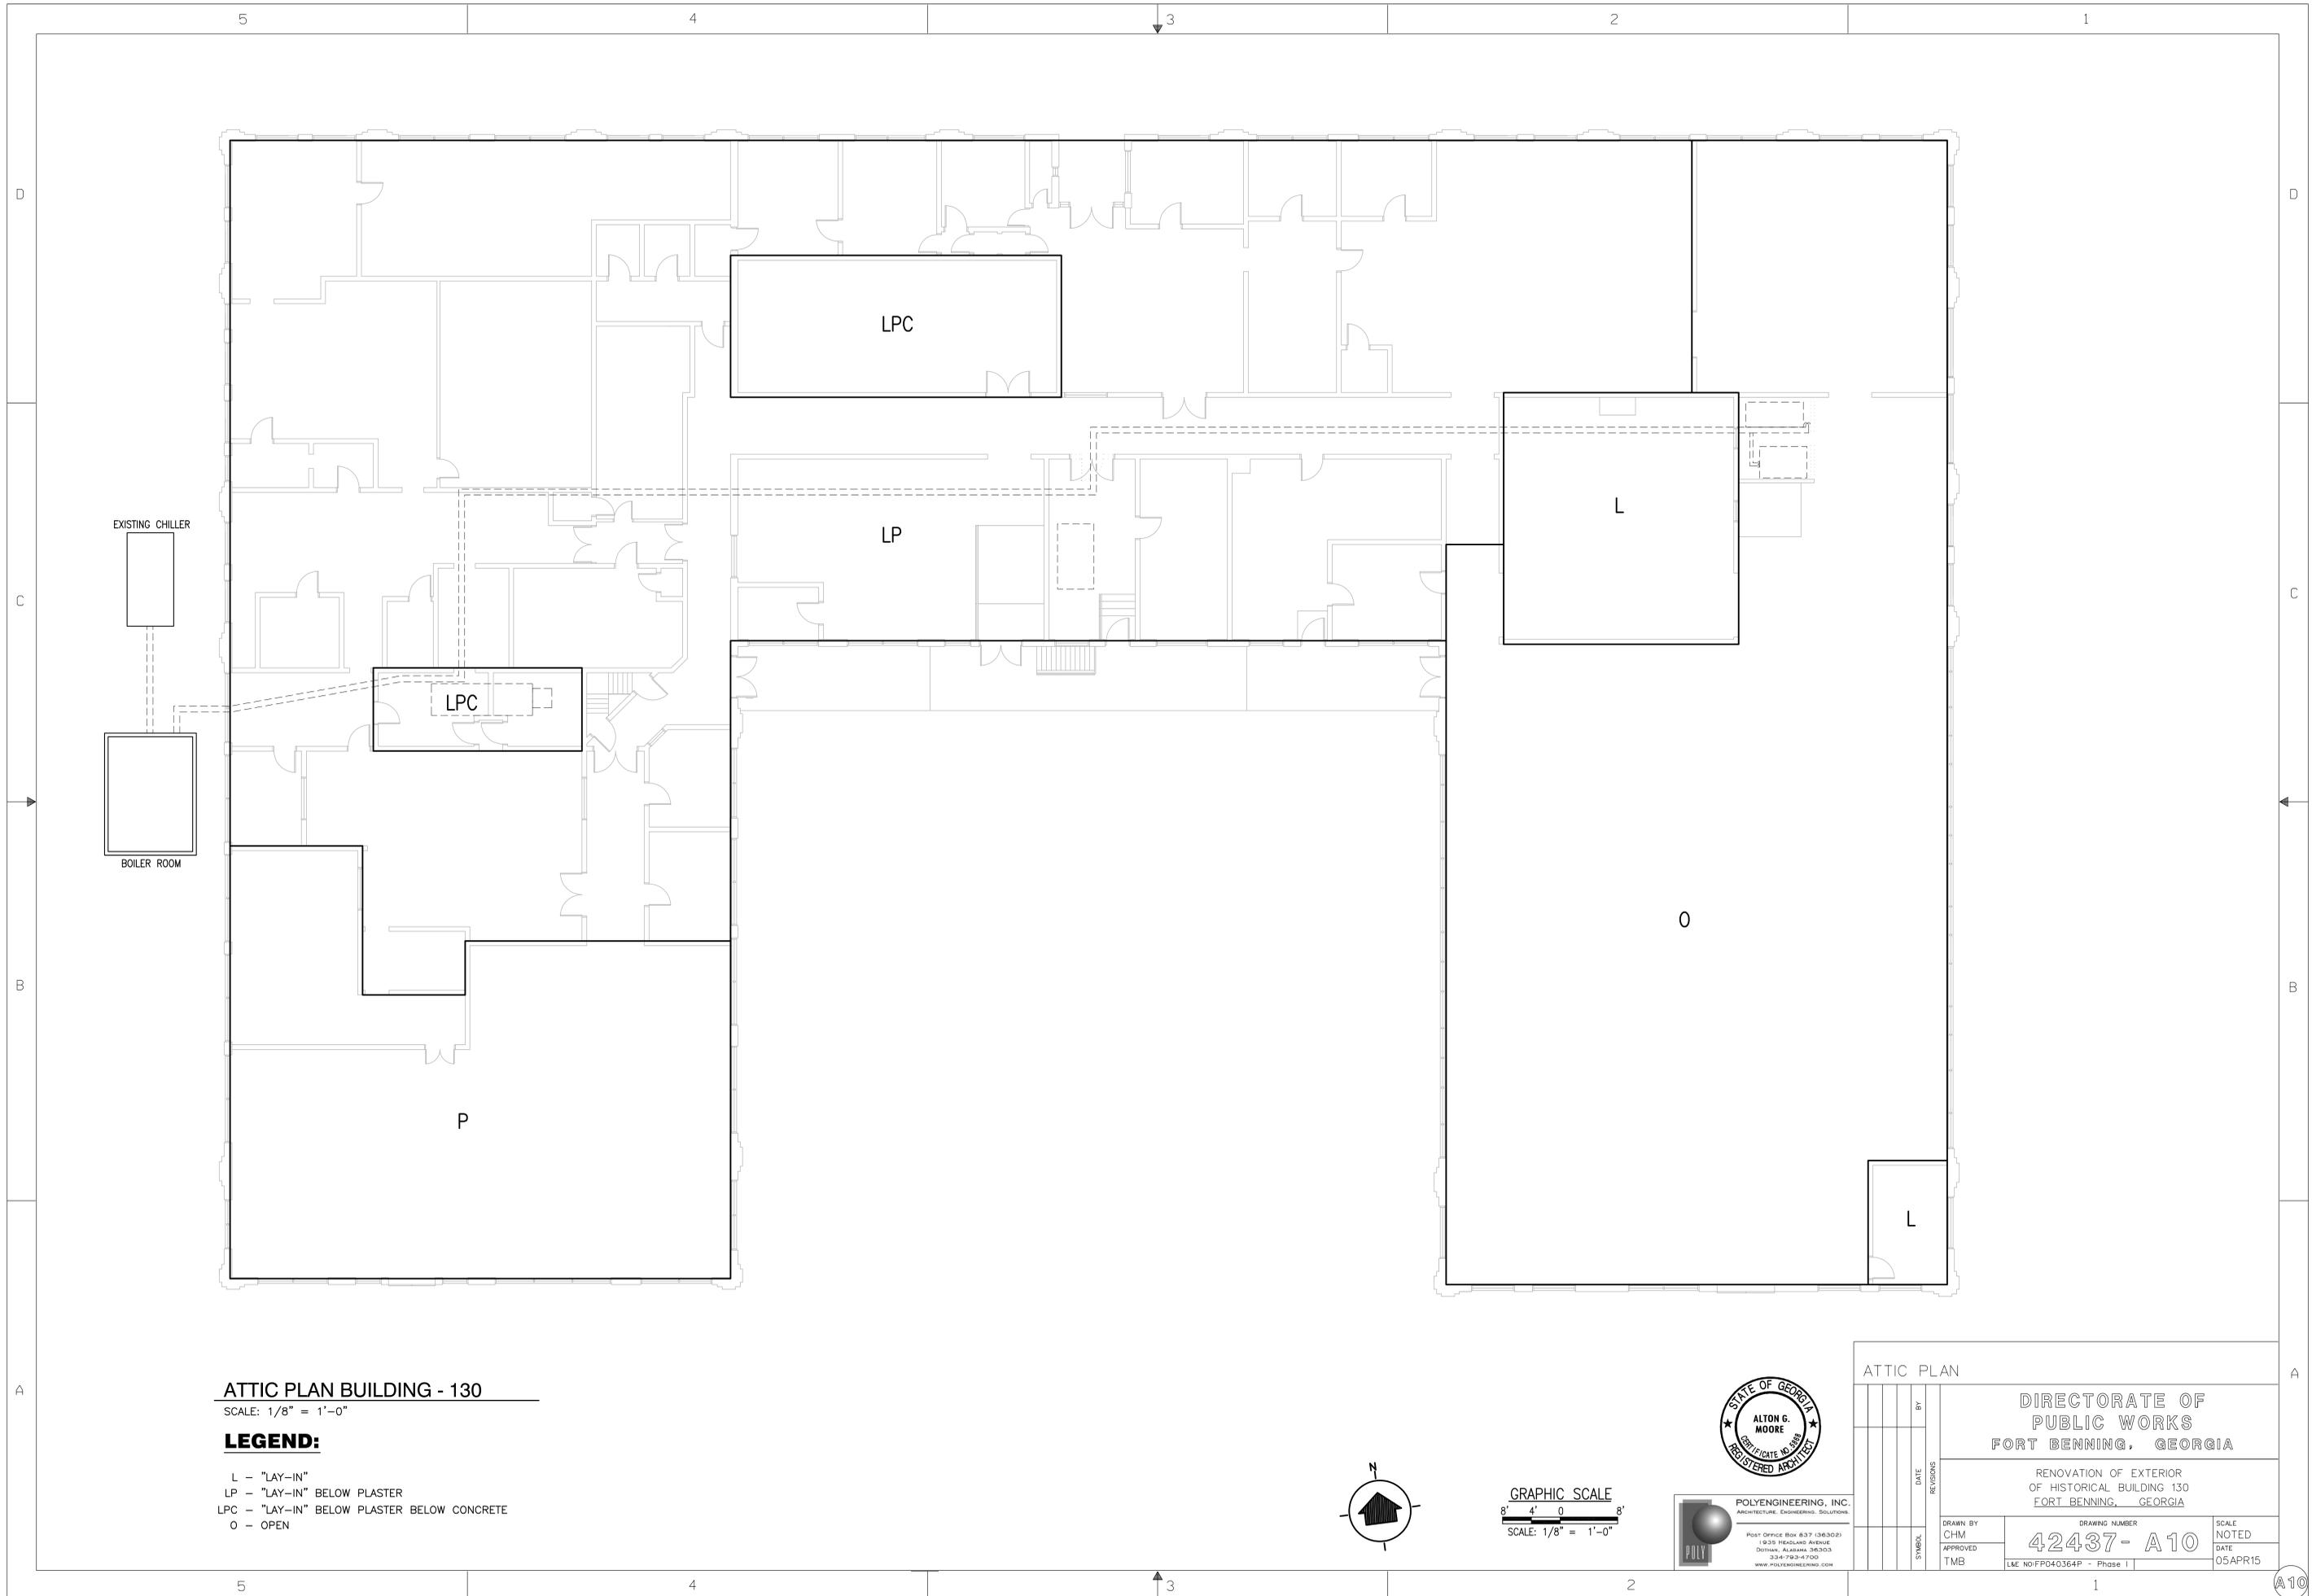


ATTIC PLAN BUILDING - 130

SCALE: 1/8" = 1'-0"

LEGEND:

- L - "LAY-IN"
- LP - "LAY-IN" BELOW PLASTER
- LPC - "LAY-IN" BELOW PLASTER BELOW CONCRETE
- O - OPEN



SYMBOL		DATE	REVISIONS	BY

DIRECTORATE OF PUBLIC WORKS FORT BENNING, GEORGIA	
RENOVATION OF EXTERIOR OF HISTORICAL BUILDING 130 FORT BENNING, GEORGIA	
DRAWN BY CHM	DRAWING NUMBER 42437- A 10
APPROVED TMB	SCALE NOTED DATE 05APR15
L&E NO:FP040364P - Phase 1	